



primaklima


THE NEW WHISPERBLOWER

- 12 NEW FANS WITH PREMIUM MOTOR BY *ebm-papst*
- POWERFUL & VERY QUIET
- LIFETIME UP TO 12 YEARS

Discover the
revolutionary design!

The innovative ventilation system:
More power at the lowest noise level.
Developed by primaklima & ebm-papst.






The right model for every need.

ONE SPEED

PK125WHSP-L

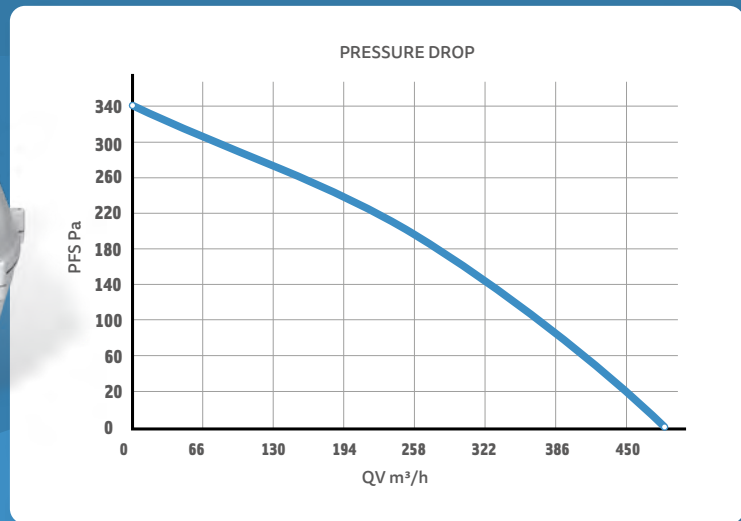


Recommended pk activated carbon filters:
 Industry Line: **K1603, K1604**
 Carbocone: **K4601, K3601**
 Eco Line: **K2601-125**

Flange: 125 mm
 Max. Airflow: 480 m³/h
 Power: 52 W
 AC Input: 230 V, 50/60 Hz, 0.23 A

Tmax: 50°C
 Dimensions: 315x309 mm (WxH)
 Weight: 2.70 kg
 (4.40 kg gross weight)

THREE SPEED

PK125WHSP-3

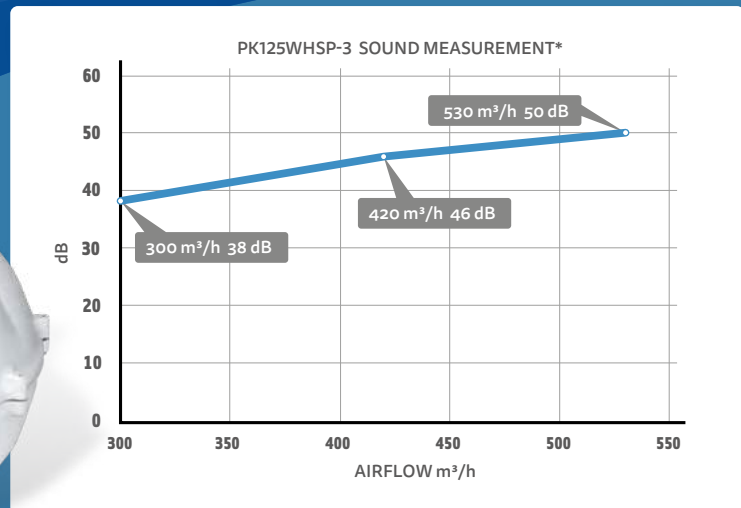


Recommended pk activated carbon filters:
 Industry Line: **K1603, K1604**
 Carbocone: **K4601, K3601**

Flange: 125 mm
 Max. Airflow: 530 m³/h
 Power: 57 W
 AC Input: 230 V, 50/60 Hz, 0.26 A

Tmax: 50°C
 Dimensions: 315x309 mm (WxH)
 Weight: 2.69 kg
 (4.38 kg gross weight)

* Sound pressure microphone 1 m to the side of the tube fan, measured in a tube open on both sides (length 1.5 m each)



primaklima

WHISPERBLOWER



TWO SPEED PK125WHSP-2



GROWERS CHOICE
EFFICIENCY

UP TO
43%*
more Airflow

* compared to previous model
with same motor

primaklima


Recommended pk activated carbon filters:
 Industry Line: **K1603, K1604**
 Carbocone: **K4601, K3601**
 Eco Line: **K2601-125**

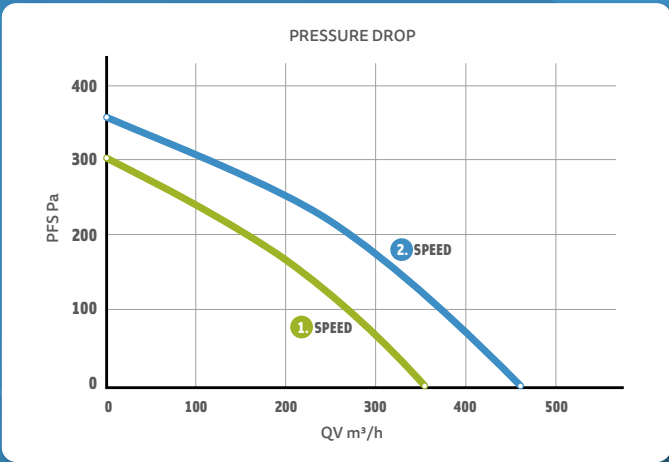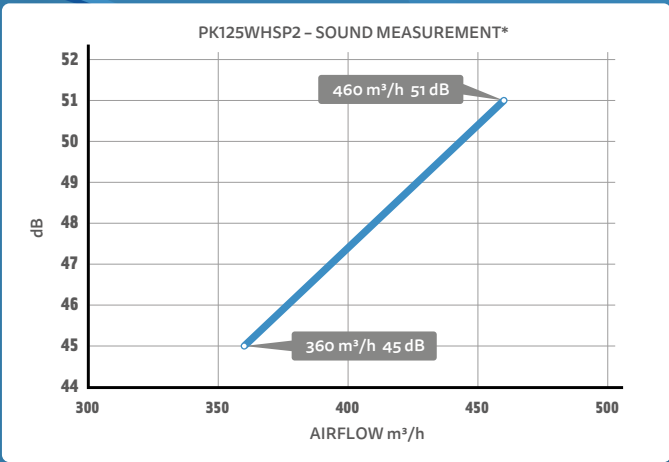

Flange: 125 mm
 Max. Airflow: 460 m³/h
 Power: 63 W
 AC Input: 230 V, 50/60 Hz, 0.29 A

Tmax: 50°C
 Dimensions: 315x309 mm (WxH)
 Weight: 2.73 kg
 (4.43 kg gross weight)

* Sound pressure microphone 1 m to the side of the tube fan, measured in a tube open on both sides (length 1.5 m each)





The right model for every need.

ECTC
TEMPERATURE CONTROLLED
PK125WHSPECTC





EC
SPEED CONTROLLED
PK125WHSP-EC

ECBLUE
WITH RJ45 INTERFACE
PK125WHSP-ECblue




Recommended pk activated carbon filters:
 Industry Line: **K1604, K1604-WHSPEC**

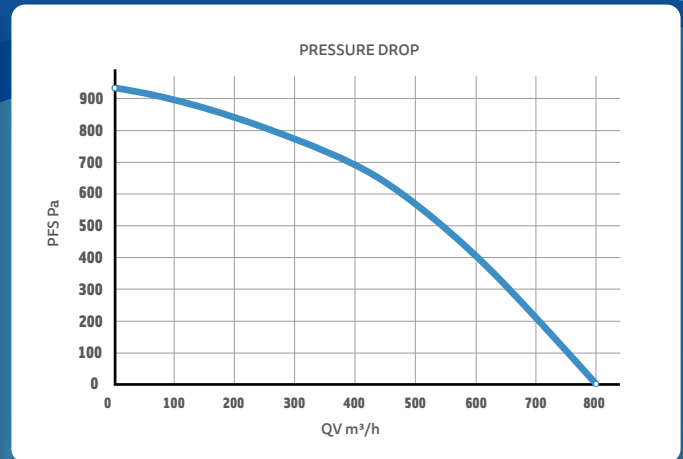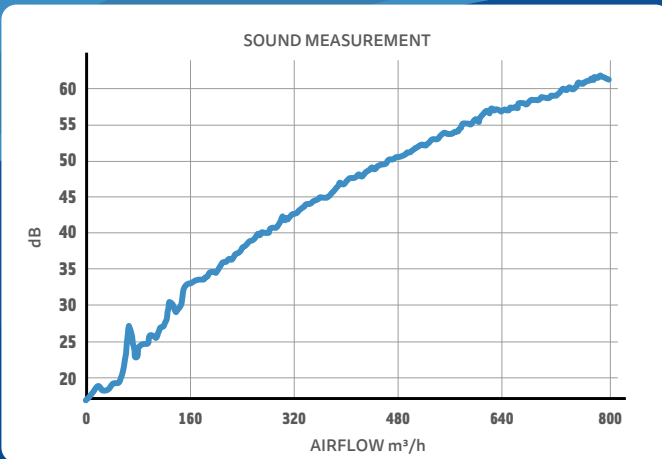


Flange: 125 mm
 Max. Airflow: 800 m³/h
 Power: 170 W
 AC Input: 230 V, 50/60 Hz, 0.74 A

Tmax: 50°C
 Dimensions: 315x309 mm (WxH)
 Weight: 2.85 kg
 (4.54 kg gross weight)



* Sound pressure microphone 1 m to the side of the tube fan, measured in a tube open on both sides (length 1.5 m each)



primaklima

BEEPSBLOWER

WARNING



The ESM version of the Whisperblower is optimized for extremely **low power consumption**. Due to this design, the motor emits **high-frequency beeps in the lower speed range**, which may not be suitable for you if you want a quiet fan.



ESM
THE ECONOMICAL
PK125WHSP-ESM

GROWERS CHOICE
SAVE ENERGY


★ **450** m³/h ★
@ **27** WATT*

* measure result @ 240 Pa


primaklima

Recommended pk activated carbon filters:
Industry Line: **K1603, K1604**
Carbocone: **K4601, K3601**
Eco Line: **K2601-125**

PRESSURE DROP

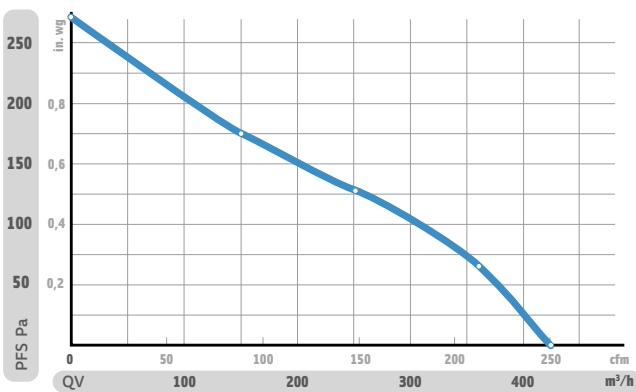


PK125WHSP-ESM - CONSUMPTION/ AIRFLOW

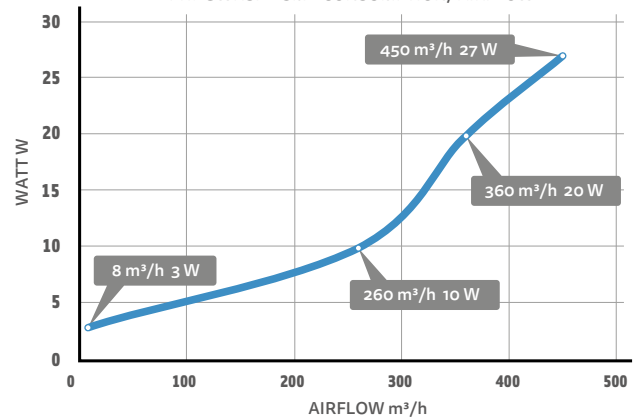


Flange: 125 mm
Max. Airflow: 450 m³/h
Power: 29 W
AC Input: 230 V, 50/60 Hz, 0.29 A

Tmax: 50°C
Dimensions: 315x309 mm (WxH)
Weight: 2.38 kg
(4.07 kg gross weight)

Low Energyconsumption




High Energyconsumption



THE NEW 150 / 160 mm flange series


ONE SPEED PK150/160WHSP-A

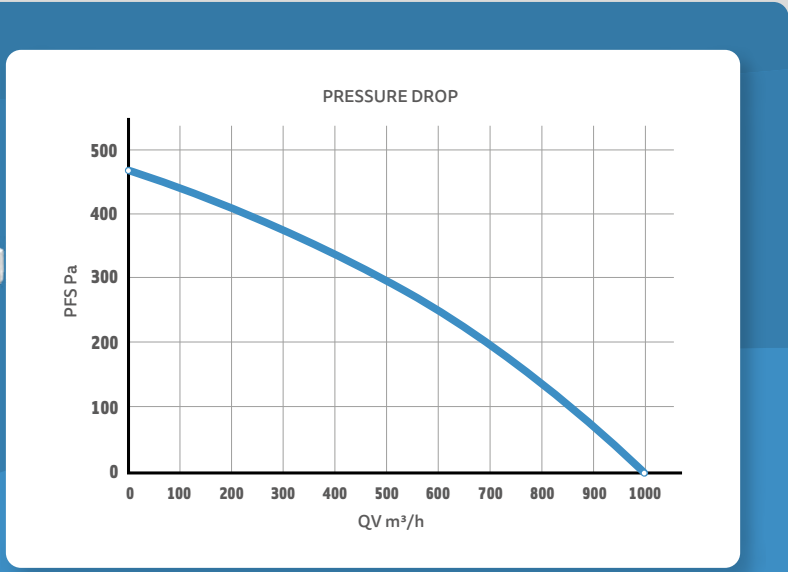

Recommended pk activated carbon filters:
 Industry Line: **K1606, K1606-WHSPEC, K1608, K1608-WHSPEC**
 Carbocone: **K3603-160, K4603-160**


Double Flange: 150 / 160 mm
 Max. Airflow: 1000 m³/h
 Power: 124 W
 AC Input: 230 V, 50/60 Hz, 0.55 A
 Tmax: 50°C
 Dimensions: 334x367 mm (WxH)
 Weight: 3.95 kg
 (5.60 kg gross weight)

ONE SPEED PK150/160WHSP-L

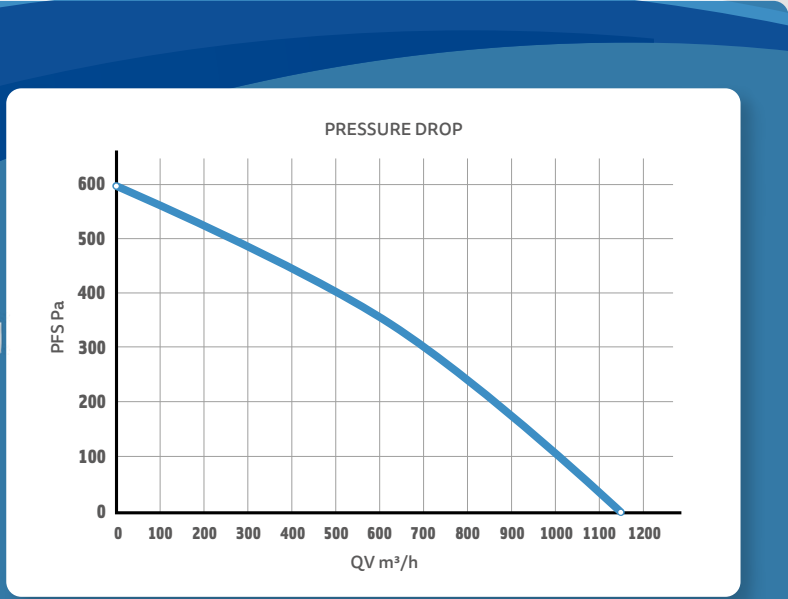

Recommended pk activated carbon filters:
 Industry Line: **K1606-WHSPEC, K1608, K1608-WHSPEC**

Double Flange: 150 / 160 mm
 Max. Airflow: 1150 m³/h
 Power: 155 W
 AC Input: 230 V, 50/60 Hz, 0.68 A
 Tmax: 50°C
 Dimensions: 334x367 mm (WxH)
 Weight: 3.95 kg
 (6 kg gross weight)



primaklima

WHISPERBLOWER



ECTC
TEMPERATURE CONTROLLED
PK150/160WHSPECTC





EC
SPEED CONTROLLED
PK150/160WHSP-EC

ECBLUE
WITH RJ45 INTERFACE
PK150/160WHSP-ECblue




Recommended pk activated carbon filters:
 Industry Line: **K1606-WHSPEC**
K1608-WHSPEC

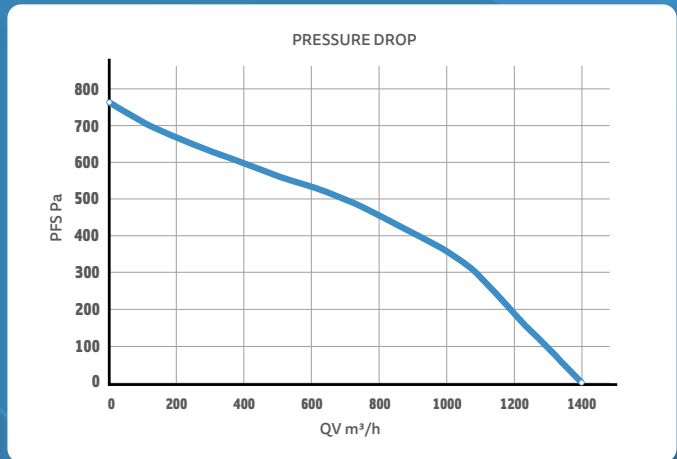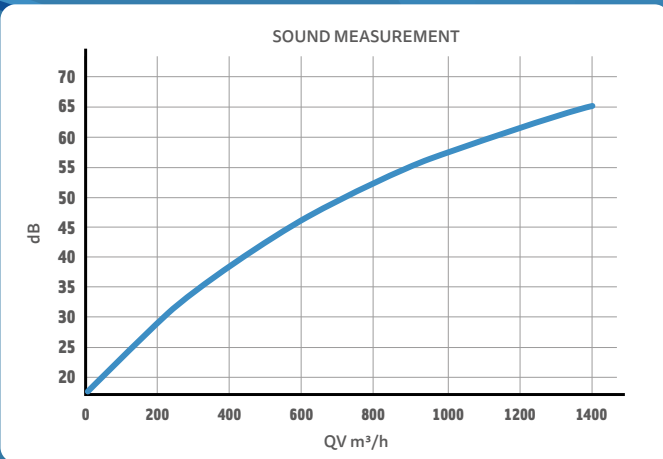

Double Flange: 150 / 160 mm
 Max. Airflow: 1400 m³/h
 Power: 170 W
 AC Input: 230 V, 50/60 Hz, 1.4 A

Tmax: 50°C
 Dimensions: 334x367 mm (WxH)
 Weight: 3.85 kg
 (5.50 kg gross weight)

* Sound pressure microphone 1 m to the side of the tube fan, measured in a tube open on both sides (length 1.5 m each)




ANOTHER OFFSPRING OF THE PRIMAKLIMA FAMILY

K1604-WHSPEC MAX. AIRFLOW 960 M3/H

K1606-WHSPEC MAX. AIRFLOW 1400 M3/H

K1608-WHSPEC MAX. AIRFLOW 1440 M3/H

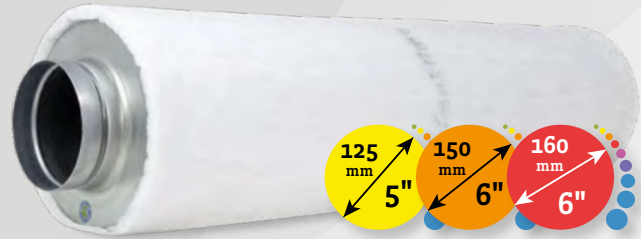

- The filters are perfect for our Whisper EC series, as well as the normal EC series 125/150/160
- Longer service life due to higher carbon weight and Cone-Technology
- Even more power savings, lower performance of the fan required for the same airflow



PK200-ECBLUE
WITH RJ45 INTERFACE

PK200EC-TC
TEMPERATURE CONTROLLED

UP TO 1350 M3/H
MAX. 170 W, 1.40 A

VENTILATION SETS


PKVS-100-TC, PKVS-125-TC, PKVS-125-2

CombiDec 2000

- Polyester and Aluminium
- 5 Layer Sandwich Construction
- Higher temperature and tear resistancy than normal PVC/Alu Ducting
- Made in Holland 

Solid Housing


- Quality material: Nylon PA6_UL94
- Made in Germany 

Solid Aluminium and Steel Filter
Made in Czech Republic 



CTC75 highly activated carbon

- 3 mm Pellets
- surface area of >1200 m²/g
- Low pressure drop
- Long service life and the best adsorption

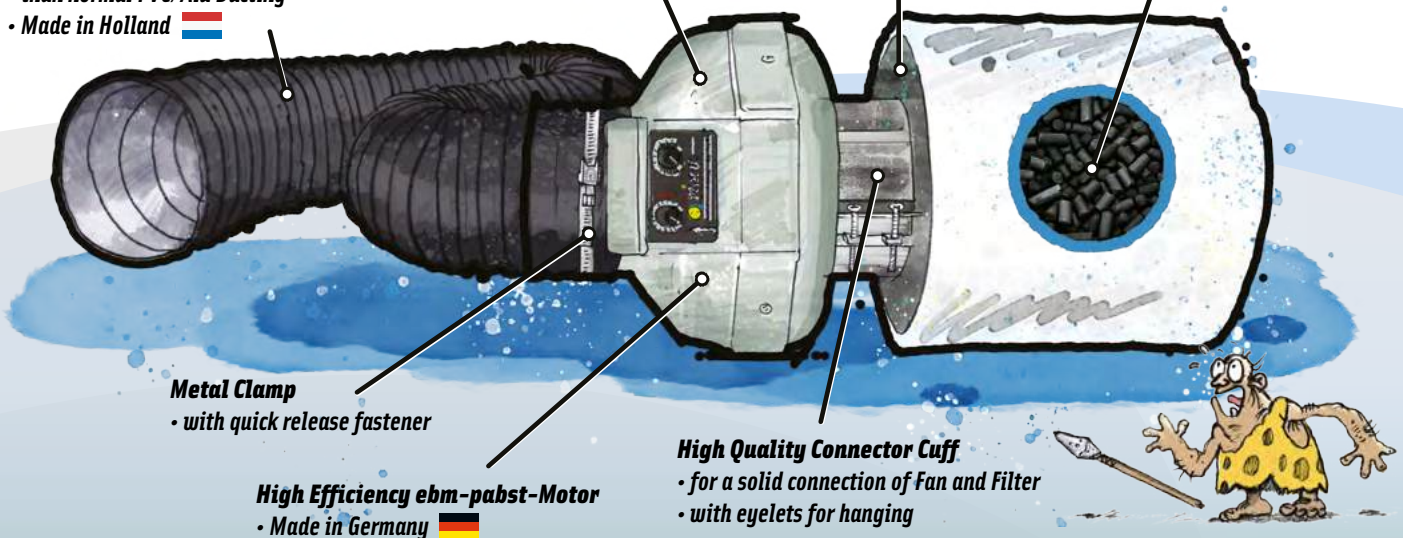

Metal Clamp
• with quick release fastener

High Efficiency ebm-pabst-Motor
• Made in Germany 

High Quality Connector Cuff
• for a solid connection of Fan and Filter
• with eyelets for hanging